


CB/T493-1998 Series Low Pressure Air Receiver

A Type




- 1-Drain; 2-Air valve ; 3-Pressure gauge; 4-Safety valve;
 5-Discharge valve; 6-Valve head; 7-Upper cone; 8-Shell;
 9-Low cone

A Type Specifications/Dimensions (mm)

Working Pressure (MPa)	Type	Capacity (m ³)	I.D. (DN)	L	h	B	Weight (kg)	
1	A0.05-1	0.05	300	-	1050	-	70	
	A0.10-1	0.10	400	-	1270	-	125	
	A0.16-1	0.16	400	-	1750	-	155	
	A0.25-1	0.25	500	-	1760	-	180	
	A0.32-1	0.32	500	-	2170	-	248	
	A0.40-1	0.40	500	-	2525	-	260	
3	A0.05-3	0.05	300	-	1050	-	100	
	A0.08-3	0.08	300	-	1360	-	120	
	A0.10-3	0.10	400	-	1270	-	165	
	A0.16-3	0.16	400	-	1750	-	215	
	A0.25-3	0.25	500	-	1760	-	295	
	A0.32-3	0.32	500	-	1775	-	345	
	A0.40-3	0.40	500	-	2185	-	410	
	A0.50-3	0.50	600	-	2270	-	450	

B Type

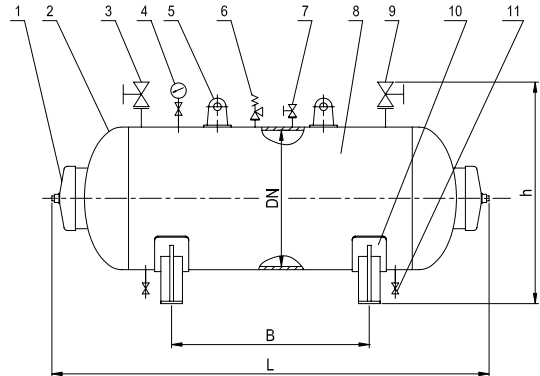

- 1-Manhole; 2-Cone; 3-Inlet valve; 4-Pressure gauge;
 5-Lifting lugs; 6-Safety valve; 7-Remote control valve; 8-Shell;
 9-Discharge valve; 10-Foundation lugs; 11-Drain valve

B Type Specifications/Dimensions (mm)

Working Pressure (MPa)	Type	Capacity (m ³)	I.D. (DN)	L	h	B	Weight (kg)	
1	B0.63-1	0.63	700	1830	1370	1005	480	
	B0.80-1	0.80	700	2270	1370	1450	520	
	B1.00-1	1.00	800	2200	1490	1245	695	
3	B0.63-3	0.63	700	1830	1470	975	680	
	B0.80-3	0.80	700	2270	1470	1420	780	
	B1.00-3	1.00	800	2200	1580	1245	950	
	B1.60-3	1.60	900	2740	1680	1690	1130	
	B2.50-3	2.50	1100	2890	1940	1625	1925	
	B4.00-3	4.00	1200	4200	2040	1860	3400	
	B4.50-3	4.50	1200	4645	2040	2310	3750	
	B5.00-3	5.00	1200	5090	2040	2760	4100	
	B6.30-3	6.30	1400	4400	2265	2830	4230	
	B8.00-3	8.00	1500	4850	2365	3190	4930	
	B10.00-3	10.00	1600	5320	2505	3545	6785	
	B12.00-3	12.00	1700	5650	2605	3775	7500	
	B14.00-3	14.00	1800	5880	2750	3905	8770	
	B16.00-3	16.00	2000	5820	3070	3340	11000	